



CORRENTES TRANSPORTADORAS PINO SÓLIDO PLACA ALTA - PSPA

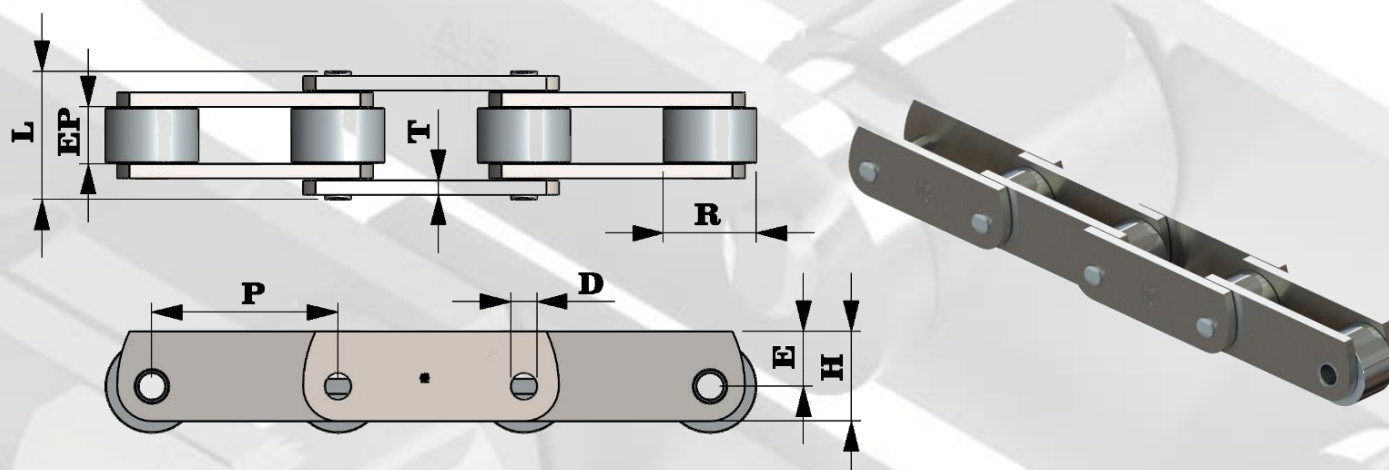


CORRENTE TRANSPORTADORA - PINO SÓLIDO PLACA ALTA (PSPA)

REFERÊNCIA AS TC	PASSO		ENTRE PLACAS mm	Ø ROLO mm	Ø PINO mm	ALTURA PLACA mm	ALTURA PLACA ALTA mm	ESPESSURA PLACAS mm	LARGURA TOTAL mm	CARGA RUPTURA Kg	PESO Kg / m
	POL	mm									
	P										
PSPA-508-A	2"	50,80	16	25,4	6,35	25,4	9,52	3,18	33	2.000	3,20
PSPA -762-A	3"	76,20									2,60
PSPA-1016-A	4"	101,60									2,30
PSPA -762-B	3"	76,20	20	38,1	7,94	38,1	15,88	4,76	44	5.000	6,50
PSPA-1016-B	4"	101,60									5,60
PSPA-1270-B	5"	127,00									5,00
PSPA-1016-C	4"	101,60	28	44,45	11,11	44,45	19,05	6,35	58	10.000	8,60
PSPA-1270-C	5"	127,00									7,80
PSPA-1524-C	6"	152,40									7,40
PSPA-1016-D	4"	101,60	32	50,8	14,29	50,8	22,23	7,94	68	20.000	13,70
PSPA-1270-D	5"	127,00									12,30
PSPA-1524-D	6"	152,40									11,70
PSPA-1016-E	4"	101,60	38	63,5	17,46	63,5	28,57	9,53	82	30.000	23,40
PSPA-1270-E	5"	127,00									20,70
PSPA-1524-E	6"	152,40									19,20

ACESSÓRIOS DE FECHAMENTO E EMENDAS DISPONÍVEIS



Elo Interno



Redução



Emenda